



**FEATURES AND SPECIFICATIONS**

**Features and Benefits**


- Elkonite 10W®3 faced CMW®3 material
- Insulated pin made of anodized aluminum
- Treated to 55 HRC for wear resistance

**Use With**

- All tapered electrode holders

**Mechanical**

- Use with flat faced electrodes

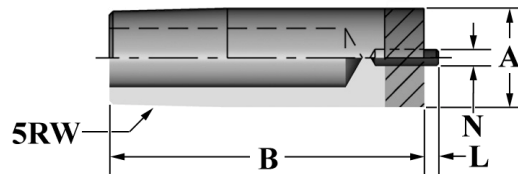

**ORDERING INFORMATION AND DIMENSIONS**

TAPER	PIN DIA.	FOR NUT THREAD SIZE "N"	PIN LENGTH	PART NO.	OVERALL DIA.	OVERALL LENGTH
	N		L		A	B
RWMA 5	.082	#4	.093	16-3764-04	5/8	2
	.093	#5		16-3764-05		
	.100	#6		16-3764-06		
	.107	3.5mm		16-3764-M3-5		
	.123	4.0mm	.156	16-3764-M4		
	.129	#8		16-3764-08		
	.143	#10		16-3764-10		
	.156	5.0mm		13-3764-M5		