

## **LAMINATED SHUNTS**

Tipaloy laminated shunts are custom designed to customer requirements and specifications and are readily available in any hole


pattern or size.
The secondary conductor strips are of high conductivity copper. Terminal ends can either, be riveted or solder dipped to allow more positive current


transfer area for improved efficiency.


## **HOW TO ORDER:**


Please advise:


Outside length (O.L.)
Width required (W)
Thickness (less clip) (T)
Hole Dia.
Type (letter shape)
Hole pattern
Available in any shape required.





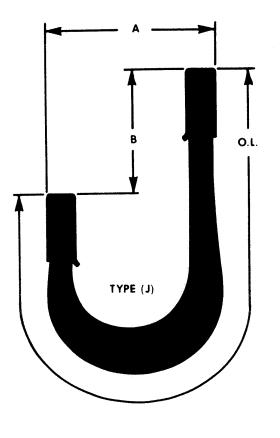





LAMINATE