



FEATURES AND SPECIFICATIONS

Features and Benefits


- Elkonite® 10W3 faced CMW®3 material
- Insulated pin made of anodized aluminum treated to 55 HRC for wear resistance
- Pin pushed down by upper electrode
- Spring returns pin to proper position

Use With

- Threaded electrode holders and adapters

Mechanical

- Has wrench flat
- Use with flat faced electrodes

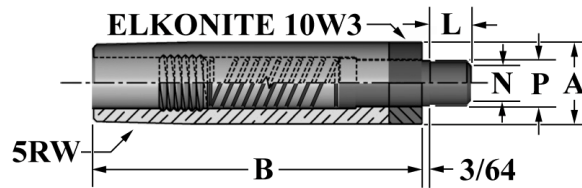

ELECTRODES
STUD/NUT

ORDERING INFORMATION AND DIMENSIONS

TAPER	PIN DIA.	FOR NUT THREAD SIZE "N"	PILOT LENGTH	PILOT DIA.	PART NO.	OVERALL DIA.	OVERALL LENGTH
	N		L	P		A	B
RWMA 5	.082	#4	.312	.142	16-3774-04	5/8	2-1/2
	.093	#5		.158	16-3774-05		
	.100	#6		.173	16-3774-06		
	.129	#8		.198	16-3774-08		
	.143	#10		.220	16-3774-10		
	.186	6 mm		.250	16-3774-M6		