



**FEATURES AND SPECIFICATIONS**



**Features and Benefits**


- Elkonite® 10W3 faced CMW®3 material
- Insulated pin made of anodized aluminum treated to 55 HRC for wear resistance
- Pin pushed down by upper electrode
- Spring returns pin to proper position

**Use With**

- All tapered electrode holders

**Mechanical**

- Has wrench flat
- Use with flat faced electrodes

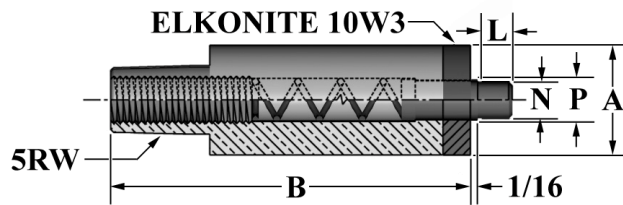

**ORDERING INFORMATION AND DIMENSIONS**

TAPER	PIN DIA.	FOR NUT THREAD SIZE "N"	PILOT LENGTH	PILOT DIA.	PART NO.	OVERALL DIA.	OVERALL LENGTH
	N		L	P		A	B
RWMA 5	.166	#12	.312	.250	16-3775-12	1	3
	.186	6 mm		.250	16-3775-M6		
	.192	1/4"		.283	16-3775-25		
	.252	8 mm		.283	16-3775-M8		
	.257	5/16"		.345	16-3775-31		
	.322	10 mm		.347	16-3775-M10		