

WATER COOLED JUMPER CABLES

All TIPALOY Water Cooled Jumpers are equipped with full-length filter tubes to ensure free-flow water passage throughout the entire system. TIPALOY Water Cooled Jumpers range from light to extra heavy-duty to meet the needs of today's industry. They make good single-conductor cables for push guns or where "Kickless" Cables are not used. Jumpers are furnished in exact lengths required.

CABLE SIZE	OUTER HOSE	HOSE I.D.
	DIAMETER	
350 MCM	1-1/2"	1-1/16"
500 MCM	1-11/16"	1-1/4"
600 MCM	1-11/16"	1-1/4"
750 MCM	1-13/16"	1-3/8"
1000 MCM	2-1/16"	1-5/8"

HOW TO ORDER:


Type "W" Water Cooled Cables:

The length is measured from the bolt hole centers at each end of the cable on straight or offset terminals. It is measured from the extreme ends of 90 degree or threaded terminals. On terminals with two holes, measure from the centers of the outer holes. The following information should be provided:

Т	/PE	MCM SIZE L	ENGTH	TERMINALS	
				1ST END	2ND END
W	'	5C or 500MCM	24"	В	B4 (1/2")

(Example: W-5C-24"-B-B4(1/2")

NOTE: TIPALOY Water Cooled Jumpers are available with any combination of the terminals shown. If these terminals do not meet your requirements, special types can be designed.

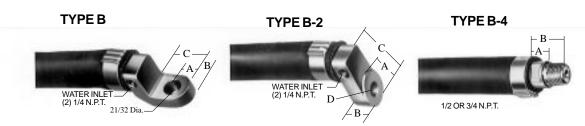

MCM	Α	В	С
350	9/16"	9/16"	1-5/16"
500/600	5/8"	9/16"	1-5/16"
750	11/16"	5/8"	1-3/8"
1000	3/4"	3/4"	1-1/2"

MCM	Α	В	С	D
350	1-1/16"	11/16"	2-11/16"	17/32"
500/600	1-3/8"	13/16"	2-7/8"	17/32"
750	1-5/8"	13/16"	3-1/8"	21/32"
1000	1-7/8"	13/16"	3-1/4"	21/32"

MCM	Α	В
350	1/2"	1-3/8"
500/600	5/8"	1-7/8"
750	5/8"	1-7/8"
1000	11/16"	2"





MCM	Α	В	С	D
350	1/2"	9/16"	1-1/4"	1-1/8"
500/600	5/8"	5/8"	1-3/8"	1-1/4"
750	5/8"	5/8"	1-3/8"	1-3/8"
1000	5/8"	5/8"	1-3/8"	1-5/8"

TYPE B-7



MCM	Α	В
350	9/16"	1-1/8"
500/600	5/8"	1-1/4"
750	5/8"	1-3/8"
1000	5/8"	1-5/8"






1 - 3/4

MCM	Α	В
350	9/16"	1-1/8"
500/600	5/8"	1-1/4"
750	5/8"	1-3/8"
1000	5/8"	1-5/8"

WATER INLET 1/4 N.P.T.





МСМ В Α 350 9/16 1-1/8" 5/8" 1-1/4" 500/600 750 5/8' 1-3/8" 1000 5/8" 1-5/8"

TYPE B-11



MCM	Α	В	С	D
350	9/16"	3/8"	1-1/8"	2"
500/600	9/16"	3/8"	1-1/8"	2"
750	7/8"	5/8"	1-1/2"	2-1/2"
1000	7/8"	3/4"	1-1/2"	2-1/2"