



**FEATURES AND SPECIFICATIONS**

**Features and Benefits**

- Shank/Cap System reduces electrode expenses in high volume and gun applications
- Use with female caps
- Made of CMW®3 material
- Available with through water hole or blind water hole

**Use With**


- Female cap electrodes

**Mechanical**

- Electrical conductivity up to 80% IACS
- Rockwell hardness up to 83 HRB



SHANKS

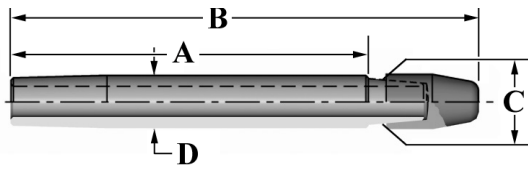

RWMA TAPER	DIMENSIONS (in inches)		
	B	C	D
4	A+0.50	.400	.482
5	A+0.54	.502	.625
6	A+0.61	.625	.750

**ORDERING INFORMATION AND DIMENSIONS**

RWMA TAPER								
4			5			6		
LENGTH (in inches)	PART NO.		LENGTH (in inches)	PART NO.		LENGTH (in inches)	PART NO.	
A	BLIND WATER HOLE	THROUGH WATER HOLE	A	BLIND WATER HOLE	THROUGH WATER HOLE	A	BLIND WATER HOLE	THROUGH WATER HOLE
1.25	MP3012	MP3012TH	1.46	MP3023	MP3023TH	1.64	MP3044	MP3044TH
1.50	MP3013	MP3013TH	1.71	MP3024	MP3024TH	1.89	MP3045	MP3045TH
1.75	MP3014	MP3014TH	1.96	MP3025	MP3025TH	2.14	MP3046	MP3046TH
2.00	MP3015	MP3015TH	2.21	MP3026	MP3026TH	2.39	MP3047	MP3047TH
2.25	MP3016	MP3016TH	2.46	MP3027	MP3027TH	2.64	MP3048	MP3048TH
2.50	MP3017	MP3017TH	2.71	MP3028	MP3028TH	2.89	MP3049	MP3049TH
2.75	MP3018	MP3018TH	2.96	MP3029	MP3029TH	3.14	MP30412	MP30412TH
3.00	MP3019	MP3019TH	3.21	MP30212	MP30212TH	3.39	MP30414	MP30414TH
3.25	MP30112	MP30112TH	3.46	MP30214	MP30214TH	3.64	MP30416	MP30416TH
3.50	MP30114	MP30114TH	3.71	MP30216	MP30216TH	3.89	MP30418	MP30418TH
3.75	MP30116	MP30116TH	3.96	MP30218	MP30218TH	4.14	MP30420	MP30420TH
4.00	MP30118	MP30118TH	4.21	MP30220	MP30220TH	4.39	MP30422	MP30422TH
			4.46	MP30222	MP30222TH			